





non-stick coatings

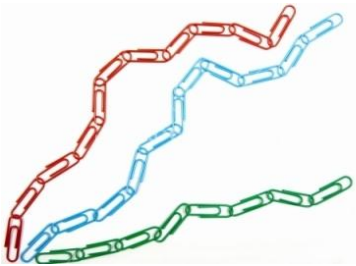

GMM PLASTIC COATING TECHNOLOGY

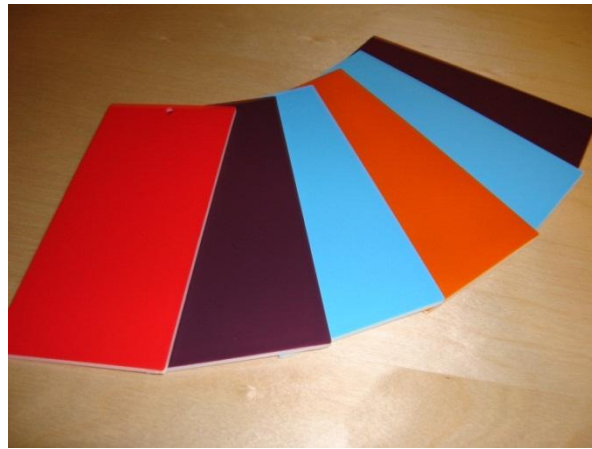



non-stick coatings

GMM PLASTIC COATINGS

- ❑ Plastic coatings provide great abrasion resistance
- ❑ Ideal for plastic parts on appliances
- ❑ Available in **any color**






non-stick coatings

GMM PLASTIC COATINGS

- ❑ Provides demonstrable consumer value
- ❑ Coatings cure at 60 C (140 F) for 30 mins
- ❑ Available with or without “soft touch” feeling

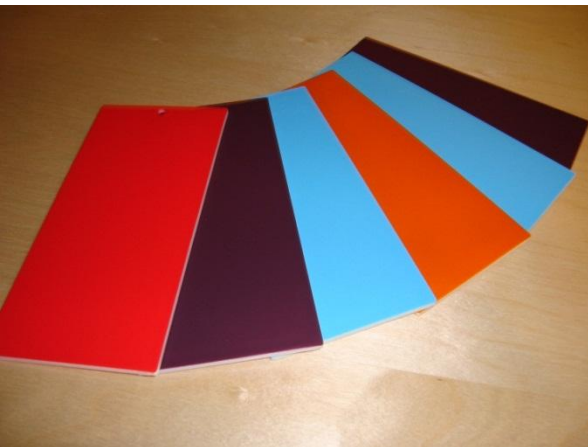



non-stick coatings

GMM PLASTIC COATINGS

POLYURETHANE COATINGS FOR PLASTIC SUBSTRATES (ONE COAT AND TWO COAT)

APPLICATION	ELECTRIC APPLIANCES, COMMUNICATION DEVICES
SUBSTRATE	ABS, PC, ABS + PC, BAKELITE, NYLON
PRETREATMENT	ALCOHOL CLEANING
DRY FILM THICKNESS (DFT)	8-15 MICRONS <u>PER COAT</u>
CURING/BAKING TEMPERATURE	60 °C (140 °F) X 30 MINUTES
COLOR AVAILABILITY	ANY COLOR
HARDNESS	HB
ALCOHOL RESISTANCE	EXCELLENT
ABRASION RESISTANCE	DEPENDS UPON SPECIFIC USE